



SPECIFICATION FOR LINED REDUCERS

NB	NB1	F	NB	NB1	F
20	15	114	125	100	203
25	20	114	125	80	203
25	15	114	125	50	203
32	25	114	150	125	229
32	20	114	150	100	229
40	32	114	150	80	229
40	25	114	150	50	229
50	40	127	150	40	229
50	32	127	150	25	229
50	25	127	200	150	279
65	50	127	200	125	279
65	40	127	200	100	279
80	65	152	200	80	279
80	50	152	250	200	305
80	40	152	250	150	305
80	25	152	250	100	305
100	50	178	300	200	356
100	40	178	300	150	356
100	25	178	350	300	406

REDUCERS

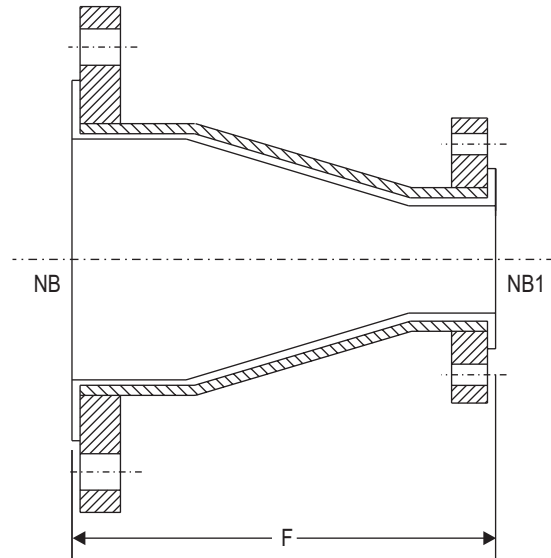

CONCENTRIC

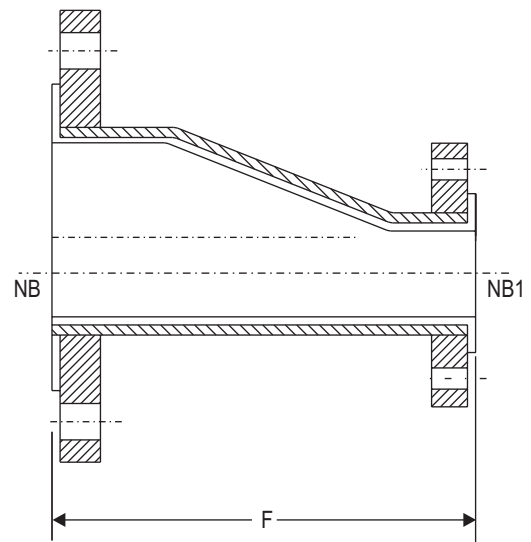

ECCENTRIC

1. All dimensions are in millimeters.
2. Tolerance as follows :
F = +0.0/-4.0 mm.
3. Intermediate combinations are available on request.